



DigiStreet

BGP761 LED55-/740 I DM11 DGR SRB 62

DigiStreet Mini - LED module 5500 lm - 740 neutral white - Safety class I (I) - Distribution medium 11 - Dark gray - Luminaire surge protection level until 6 kV differential mode and 8 kV common mode - Spigot for diameter 62 mm

Developed with the aim to become your long term partner ,the system ready architecture of DigiStreet enables you to enjoy the benefits of connected lighting systems today and also gets the city ready for the innovations to come!. Its two sockets enable you to connect directly to the Philips CityTouch system and is also prepared to connect you to the future innovations of IoT.Next to this, each individual luminaire is uniquely identifiable, thanks to the Philips Service tag application. With a simple scan of a QR code, placed on the inside of the mast door, you gain instant access to the luminaire configuration, making maintenance and programming operations faster and easier, no matter what stage of the luminaire's lifetime. Digistreet is also equipped with dedicated light recipes that: 1) maintain an optimal ecosystems for bats or 2) preserve a dark night sky.

Product data

General Information	
Lamp family code	LED55 [LED module 5500 lm]
Light source color	740 neutral white
Light source replaceable	Yes
Number of gear units	1 unit
Driver/power unit/transformer	Power supply unit with DALI and
	SystemReady interface
Driver included	SystemReady interface Yes
Driver included Optical cover/lens type	
	Yes

Control interface	-
Connection	Screw connection block 5-pole
Cable	-
Protection class IEC	Safety class I (I)
Flammability mark	NO [-]
CE mark	CE mark
ENEC mark	ENEC mark
Warranty period	5 years
Optic type outdoor	Distribution medium 11

Datasheet, 2021, August 20 data subject to change

DigiStreet

Remarks	* At extreme ambient temperatures the
	luminaire might automatically dim down to
	protect components
Constant light output	No
Number of products on MCB of 16 A type	31
В	
EU RoHS compliant	Yes
Light source engine type	LED
Serviceability class	Class A, luminaire is equipped with
	serviceable parts (when applicable): LED
	board, driver, control units, surge protection
	device, optics, front cover and mechanical
	parts
Product family code	BGP761 [DigiStreet Mini]
Light Technical	
Upward light output ratio	0
Standard tilt angle posttop	O°
Standard tilt angle side entry	0°
Operating and Electrical	
Input Voltage	220-240 V
Input Frequency	50 to 60 Hz
Inrush current	9.6 A
Inrush time	0.13 ms
Power Factor (Min)	0.94
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Housing Material	Aluminum die–cast
Reflector material	Polycarbonate
Optic material	Acrylate
Optical cover/lens material	Glass
Fixation material	Stainless steel
Mounting device	62 [Spigot for diameter 62 mm]
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear
Overall length	860 mm
Overall width	236 mm
Overall height	107 mm
Effective projected area	0.0666 m²


Color	Dark gray
Dimensions (Height x Width x Depth)	107 x 236 x 860 mm (4.2 x 9.3 x 33.9 in)
Approval and Application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK09 [10 J]
${\bf Surge\ Protection\ (Common/Differential)}$	Luminaire surge protection level until 6 kV
	differential mode and 8 kV common mode
Initial Performance (IEC Compliant)	<u> </u>
Initial luminous flux (system flux)	5096 lm
Luminous flux tolerance	+/-7%
Initial LED luminaire efficacy	154 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	70
Initial chromaticity	(0.38, 0.38) SDCM <5
Initial input power	33 W
Power consumption tolerance	+/-11%
Init. Color Rendering Index Tolerance	+/-2
Over Time Performance (IEC Compl	iant)
Control gear failure rate at median useful	. 10 %
life 100000 h	
Lumen maintenance at median useful	L97
life* 100000 h	
Application Conditions	
Application Conditions	40 to 150 °C
Ambient temperature range Maximum dim level	-40 to +50 °C
Maximum dim tevet	Not applicable
Product Data	
Full product code	871869638596800
Order product name	BGP761 LED55-/740 I DM11 DGR SRB 62
EAN/UPC - Product	8718696385968
Order code	38596800
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910925866236
Net Weight (Piece)	7.790 kg





DigiStreet

Dimensional drawing

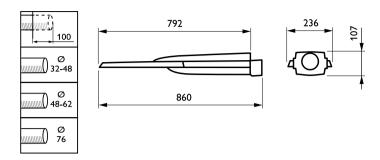

DigiStreet BGP760-BTP764

