



MASTER PL-L Xtra 4 Pin



MASTER PL-L XTRA 36W/840/4P 1CT/25

Energy-saving compact fluorescent lamps; Compact long-arc low-pressure mercury discharge lamp; Envelope consists of 2 parallel fluorescent tubes

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap-Base	2G11 [2G11]
Life To 10% Failures (Nom)	14000 h
Life to 50% Failures (Nom)	21000 h
Life to 50% Failures Preheat (Nom)	36000 h
System Description	na [-]
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	98 %
LSF 8000 h Rated	97 %
LSF 12000 h Rated	95 %
LSF 16000 h Rated	88 %
LSF 20000 h Rated	58 %
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %

LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	97 %
LSF Preheat 20000 h Rated	94 %
Flux measurement reference	Sphere
Light technical	
Colour Code	840 [CCT of 4000K]
Luminous Flux (Nom)	2800 lm
Luminous Flux (Rated) (Nom)	2900 lm
Colour Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	0.38
Chromaticity Coordinate Y (Nom)	0.38
Colour Temperature, horizontal (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	81 lm/W

MASTER PL-L Xtra 4 Pin

Colour Rendering Index horiz (Nom)	80
Depreciation 2000 hrs	94 %
LLMF 4000 h Rated	93 %
Depreciation 5000 hrs	92 %
LLMF 8000 h Rated	91 %
LLMF 12000 h Rated	90 %
LLMF 16000 h Rated	89 %
LLMF 20000 h Rated	88 %

Operating and electrical

Power (Rated) (Nom)	36.3 W
Lamp Current (Nom)	0.435 A

Temperature

Design Temperature (Nom)	30 °C
--------------------------	-------

Controls and dimming

Dimmable	Yes
----------	-----

Mechanical and housing

Cap-Base Information	4P
----------------------	----

Approval and application

Energy Efficiency Class	G
Mercury (Hg) Content (Max)	3 mg
Mercury (Hg) Content (Nom)	3.0 mg
Energy Consumption kWh/1000 h	37 kWh
EPREL Registration Number	423277

Product data

Full product code	871150089760240
Order product name	MASTER PL-L Xtra 36W/840/4P 1CT/25
EAN/UPC - Product	8711500897602
Order code	89760240
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927904784014
Net Weight (Piece)	104.000 g
ILCOS Code	FSD-36/40/1B-E-2G11



Dimensional drawing

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-L Xtra 36W/ 840/4P 1CT/25	39.0 mm	18.0 mm	384.2 mm	410 mm	416.6 mm

MASTER PL-L Xtra 36W/840/4P 1CT/25

MASTER PL-L Xtra 4 Pin

Photometric data

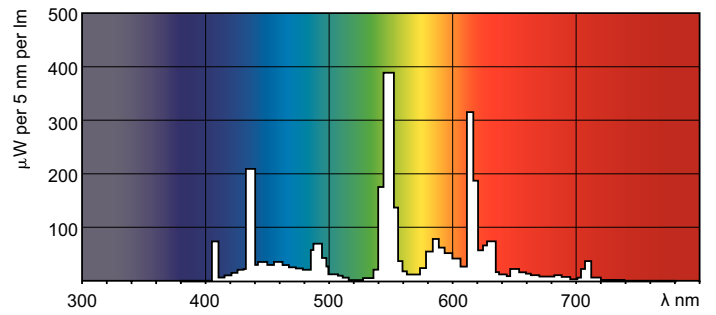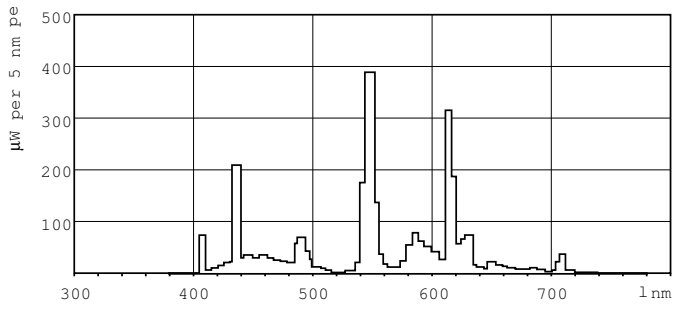

Lightcolour /840

Lightcolour /840

