



MASTER TL5 High Efficiency

MASTER TL5 HE 35W/840 UNP/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Operating and Electrical	
Cap-Base	G5 [G5]	Luminous Efficacy (rated) (Nom)	94 lm/W
Life to 50% Failures Preheat (Nom)	24000 h	Colour Rendering Index horiz (Max)	85
Features	na [Not Applicable]	Colour Rendering Index horiz (Min)	80
System Description	High Efficiency	Colour Rendering Index horiz (Nom)	82
LSF Preheat 2000 h Rated	99 %	Depreciation 2000 hrs	96 %
LSF Preheat 4000 h Rated	99 %	LLMF 4000 h Rated	95 %
LSF Preheat 6000 h Rated	99 %	Depreciation 5000 hrs	94 %
LSF Preheat 8000 h Rated	99 %	LLMF 8000 h Rated	93 %
LSF Preheat 16000 h Rated	97 %	LLMF 12000 h Rated	92 %
LSF Preheat 20000 h Rated	84 %	LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light Technical		Temperature	
Colour Code	840 [CCT of 4000K]	Design Temperature (Nom)	35 °C
Luminous Flux (Nom)	3650 lm		
Luminous Flux (Rated) (Nom)	3325 lm		
Colour Designation	Cool White (CW)		
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	104 lm/W		
Colour Temperature, horizontal (Nom)	4000 K		

MASTER TL5 High Efficiency

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Cap-Base Information	Green Plate
----------------------	-------------

Approval and Application

Energy Efficiency Label	A+
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	38 kWh

Product Data

Full product code	87115006110555
-------------------	----------------

Order product name	MASTER TL5 HE 35W/840 UNP/40
EAN/UPC - Product	8711500611055
Order code	61105555
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927927084018
Net Weight (Piece)	127.400 g
ILCOS Code	FDH-35/40/1B-L/P-G5-16/1450



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE 35W/840 UNP/40	17 mm	1449.0 mm	1456.1 mm	1453.7 mm	1463.2 mm

TL5 HE 35W/840/GP

Photometric data

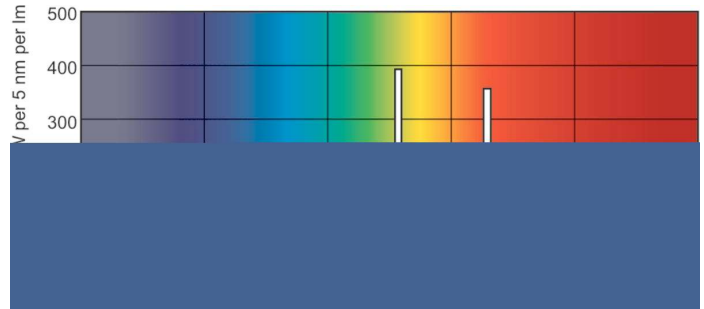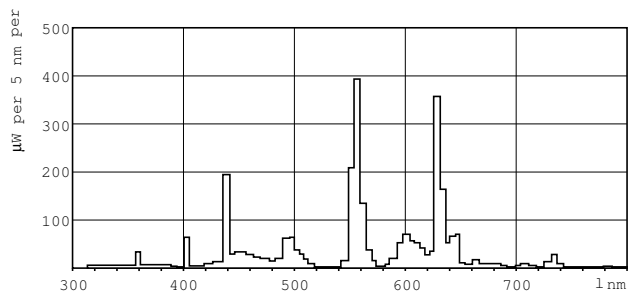

Lightcolour /840

Lightcolour /840

MASTER TL5 High Efficiency

Lifetime



LDLE_TL5-HE8_0001-Life expectancy diagram

LDLE_TL5-HE8_0002-Life expectancy diagram



LDLM_TL5-HE8_0001-Lumen maintenance diagram

