



MASTER TL5 High Output

MASTER TL5 HO 54W/840 1SL/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Luminous Efficacy (rated) (Nom)	
Cap-Base	G5 [G5]		83 lm/W
Life to 50% Failures Preheat (Nom)	30000 h	Colour Rendering Index horiz (Max)	85
Features	na [Not Applicable]	Colour Rendering Index horiz (Min)	80
System Description	High Output (HO)	Colour Rendering Index horiz (Nom)	85
LSF Preheat 2000 h Rated	99 %	Depreciation 2000 hrs	96 %
LSF Preheat 4000 h Rated	99 %	LLMF 4000 h Rated	95 %
LSF Preheat 6000 h Rated	99 %	Depreciation 5000 hrs	94 %
LSF Preheat 8000 h Rated	99 %	LLMF 8000 h Rated	93 %
LSF Preheat 16000 h Rated	97 %	LLMF 12000 h Rated	92 %
LSF Preheat 20000 h Rated	84 %	LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light Technical		Operating and Electrical	
Colour Code	840 [CCT of 4000K]	Power (Rated) (Nom)	54.1 W
Luminous Flux (Nom)	5000 lm	Lamp Current (Nom)	0.455 A
Luminous Flux (Rated) (Nom)	4500 lm		
Colour Designation	Cool White (CW)	Temperature	
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	93 lm/W	Design Temperature (Nom)	35 °C
Colour Temperature, horizontal (Nom)	4000 K		

MASTER TL5 High Output

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Cap-Base Information	Green Plate
----------------------	-------------

Approval and Application


Energy Efficiency Label	A+
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	59 kWh

Product Data

Full product code	871150064318655
-------------------	-----------------

Order product name	MASTER TL5 HO 54W/840 SLV/40
EAN/UPC - Product	8711500643186
Order code	64318655
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927929084055
Net Weight (Piece)	105.800 g
ILCOS Code	FDH-54/40/1B-L/P-G5-16/1150


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 54W/840 SLV/40	17 mm	1149.0 mm	1156.1 mm	1153.7 mm	1163.2 mm

TL5 HO 54W/840

Photometric data

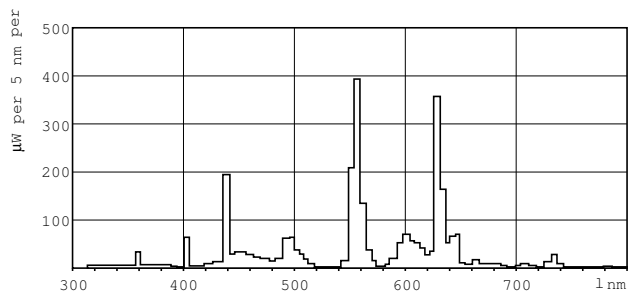

Lightcolour /840

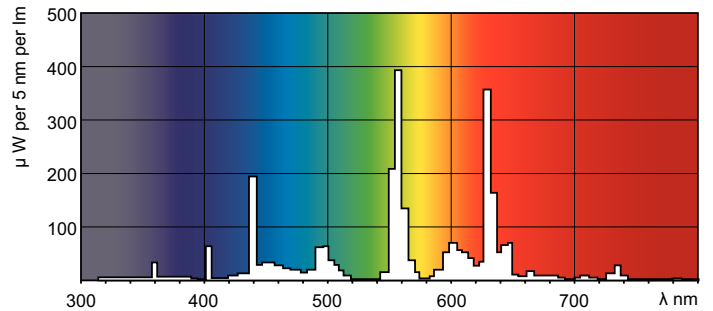

Lightcolour /840

MASTER TL5 High Output

Lifetime



LDLE_TL5-HO8_0001-Life expectancy diagram

LDLE_TL5-HO8_0002-Life expectancy diagram



LDLM_TL5-HO8_0001-Lumen maintenance diagram

