



# MASTER TL-D Food

## MASTER TL-D Food 30W/79 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
Life to 50% Failures (Nom)	15000 h
Life to 50% Failures Preheat (Nom)	20000 h

Light Technical	
Colour Code	79
Luminous Flux (Nom)	1300 lm
Colour Designation	Food
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	85 %
Colour Temperature, horizontal (Nom)	3800 K
Luminous Efficacy (rated) (Nom)	43 lm/W
Colour Rendering Index horiz (Nom)	74

Operating and Electrical	
Power (Rated) (Nom)	30.0 W
Lamp Current (Nom)	0.360 A
Voltage (Nom)	98 V

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb Shape	T8 [ 26 mm (T8)]


Approval and Application	
Mercury (Hg) Content (Nom)	5.0 mg
Energy Consumption kWh/1000 h	37 kWh

Product Data	
Full product code	871150070624940
Order product name	MASTER TL-D Food 30W/79 SLV/25
EAN/UPC - Product	8711500706249
Order code	70624940
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928025402043
Net Weight (Piece)	113.000 g
ILCOS Code	FD-30/38/2A-E-G13

# MASTER TL-D Food



## Dimensional drawing

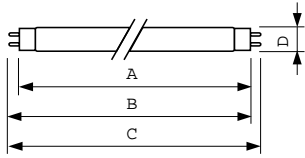

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Food 30W/79 SLV/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

TL-D Food 30W/79



## Photometric data

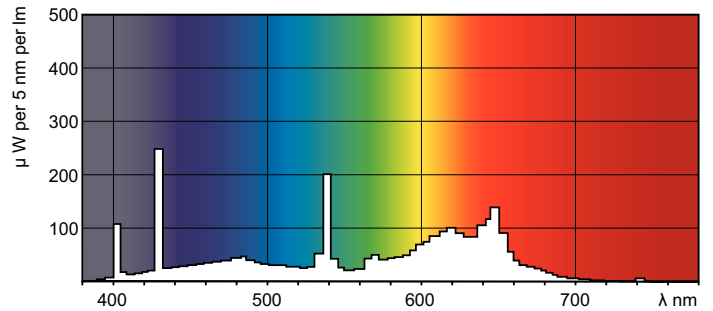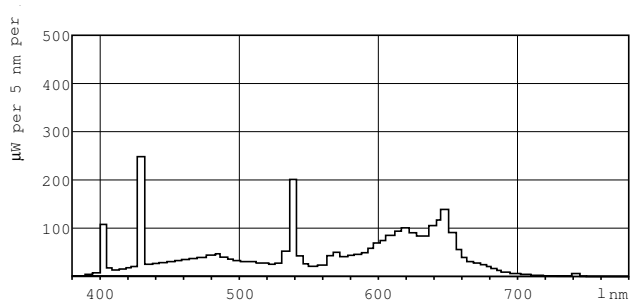

Lightcolour /79

Lightcolour /79

## Lifetime

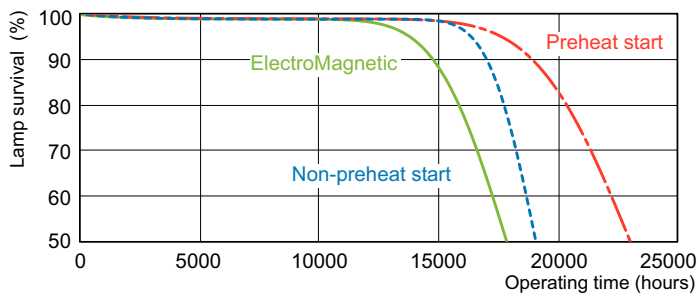


LDLE\_TL-DFOOD\_0002-Life expectancy diagram

LDLE\_TL-DFOOD\_0001-Life expectancy diagram

## MASTER TL-D Food

### Lifetime

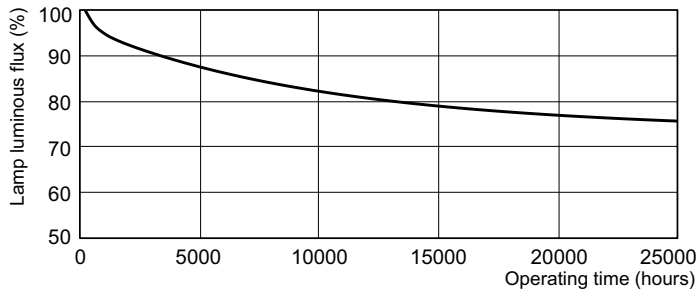

LDLM\_TL-DFOOD\_0001-Lumen maintenance diagram

