



# TL-D Colored

## TL-D Colored 58W Blue 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General information		Voltage (Nom)	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]	111 V	
Life To 10% Failures (Nom)	12000 h	Temperature	
Life to 50% Failures (Nom)	15000 h	Design Temperature (Nom)	25 °C
Light technical		Controls and dimming	
Colour Code	180	Dimmable	Yes
Luminous Flux (Nom)	1600 lm	Mechanical and housing	
Luminous Flux (Rated) (Nom)	1600 lm	Bulb Shape	T8 [ 26 mm (T8)]
Colour Designation	Blue (B)	Approval and application	
Depreciation 2000 hrs	95 %	Mercury (Hg) Content (Nom)	13.0 mg
Operating and electrical		Energy Consumption kWh/1000 h	71 kWh
Power (Rated) (Nom)	58.5 W		
Lamp Current (Nom)	0.670 A		


## TL-D Colored

### Product data

Full product code	871150095451040
Order product name	TL-D Colored 58W Blue 1SL/25
EAN/UPC - Product	8711500954510
Order code	95451040
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	25
Material Nr. (12NC)	928049001805
Net Weight (Piece)	167.000 g


### Dimensional drawing

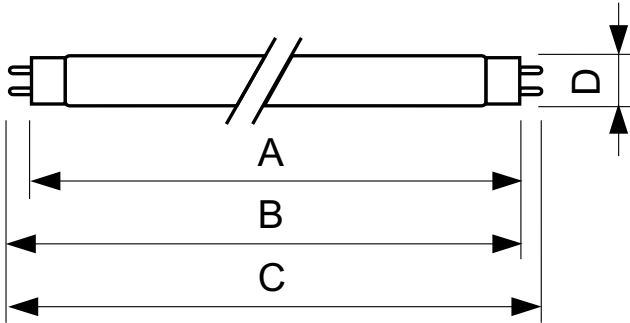

TL-D Colored 58W Blue 1SL/25

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D Colored 58W Blue 1SL/25	28.0 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm

### Photometric data

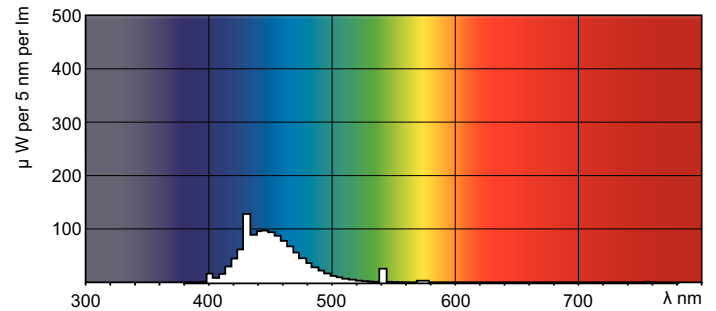

LDPB\_TL-DCOL\_180-Spectral power distribution B/W

LDPO\_TL-DCOL\_180-Spectral power distribution Colour

