



# MASTER SON-T APIA Plus Xtra

## MASTER SON-T APIA Plus Xtra 150W E40 1SL/12

High Pressure Sodium lamp with clear tubular outer bulb shape, high output and longest reliable lifetime

### Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- HF gear must comply with Philips LDi guideline
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap-Base	E40 [ E40]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Life to 5% Failures (Nom)	28000 h
Life To 10% Failures (Nom)	32000 h
Life to 20% Failures (Nom)	36500 h
Life to 50% Failures (Nom)	45000 h
System Description	External Ignitor (E)
LSF 2000 h Rated	100 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	99 %
LSF 20000 h Rated	99 %


Light Technical	
Colour Code	- [ Not Specified]
Luminous Flux (Rated) (Nom)	18200 lm
Chromaticity Coordinate X (Nom)	0.535
Chromaticity Coordinate Y (Nom)	0.420
Colour Temperature, horizontal (Nom)	2000 K
Luminous Efficacy (rated) (Nom)	118.51 lm/W
Colour Rendering Index horiz (Max)	25
Depreciation 2000 hrs	99 %
LLMF 4000 h Rated	98 %
Depreciation 5000 hrs	97 %
LLMF 8000 h Rated	96 %
LLMF 12000 h Rated	96 %
LLMF 16000 h Rated	95 %
LLMF 20000 h Rated	94 %

# MASTER SON-T APIA Plus Xtra

Ratio Scotopic/Photopic Lumens	0.55
<b>Operating and Electrical</b>	
Power (Rated) (Nom)	154.0 W
Lamp Current (EM) (Nom)	0.178 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	2800 V
Re-Ignition Time (Min) (Max)	180 s
Ignition Time (Max)	5 s
Voltage (Max)	115 V
Voltage (Min)	85 V
Voltage (Nom)	98 V
<b>Controls and Dimming</b>	
Dimmable	Yes
Run-up Time 90% (Max)	4 min
<b>Mechanical and Housing</b>	
Bulb Finish	Clear
<b>Approval and Application</b>	
Energy Efficiency Label	A+

Mercury (Hg) Content (Nom)	15.1 mg
Energy Consumption kWh/1000 h	169 kWh
<b>Luminaire Design Requirements</b>	
Bulb Temperature (Max)	450 °C
Cap-Base Temperature (Max)	250 °C
<b>Product Data</b>	
Full product code	872790092733700
Order product name	MASTER SON-T APIA Plus Xtra 150W E40 1SL/12
EAN/UPC - Product	8727900927337
Order code	92733700
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928150319230
Net Weight (Piece)	140.000 g
ILCOS Code	ST-150-H/E-E40

## Dimensional drawing





SON-T APIA Plus Xtra 150W E40

Product	D (max)	O	L	C (max)
MASTER SON-T APIA Plus Xtra 150W E40 1SL/12	48 mm	61 mm	132 mm	210 mm

# MASTER SON-T APIA Plus Xtra



## Photometric data

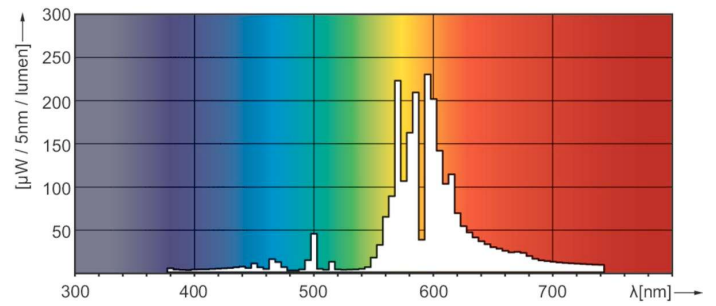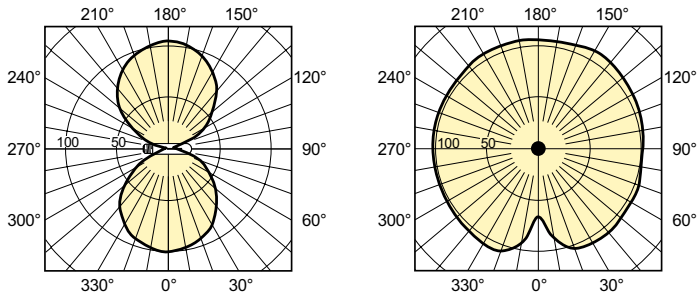

LDLD\_SONTAPIA-Light distribution diagram

LDPO\_SONTAPIA\_0002-Spectral power distribution Colour

## Lifetime

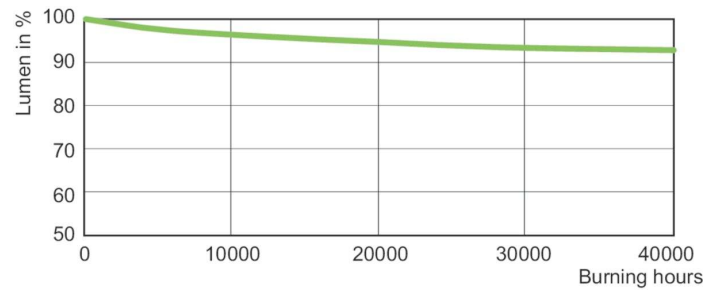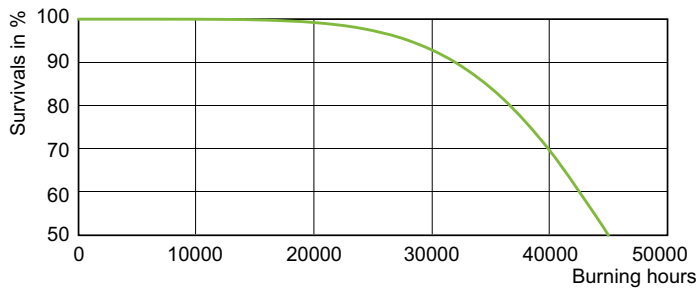

LDLE\_SONTAPIA\_0005-Life expectancy diagram

LDLM\_SONTAPIA\_0001-Lumen maintenance diagram

