



MASTER SON APIA Plus Xtra



MASTER SON APIA Plus Xtra 70W E27 1SL/24

High Pressure Sodium lamp with opalized outer bulb, high output and longest reliable lifetime

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap-Base	E27 [E27]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	24000 h
Life To 10% Failures (Nom)	28000 h
Life to 20% Failures (Nom)	32000 h
Life to 50% Failures (Nom)	40000 h
System Description	External Ignitor (E)
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	99 %
LSF 20000 h Rated	97 %
Flux measurement reference	Sphere


Light technical	
Colour Code	- [Not Specified]
Luminous Flux (Nom)	6600 lm
Luminous Flux (Rated) (Nom)	6600 lm
Chromaticity Coordinate X (Nom)	0.54
Chromaticity Coordinate Y (Nom)	0.42
Colour Temperature, horizontal (Nom)	1900 K
Luminous Efficacy (rated) (Nom)	89.19 lm/W
Colour Rendering Index horiz (Max)	25
Colour Rendering Index horiz (Nom)	-
Depreciation 2000 hrs	91 %
LLMF 4000 h Rated	88 %
Depreciation 5000 hrs	87 %
LLMF 8000 h Rated	86 %
LLMF 12000 h Rated	85 %
LLMF 16000 h Rated	84 %
LLMF 20000 h Rated	84 %

MASTER SON APIA Plus Xtra

Ratio Scotopic/Photopic Lumens	0.50
Operating and electrical	
Power (Rated) (Nom)	74.0 W
Lamp Current (EM) (Nom)	0.96 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	1800 V
Re-Ignition Time (Min) (Max)	180 s
Ignition Time (Max)	5 s
Voltage (Max)	105 V
Voltage (Min)	75 V
Voltage (Nom)	92 V
Controls and dimming	
Dimmable	Yes
Run-up Time 90% (Max)	4 min
Mechanical and housing	
Bulb Finish	Coated glass
Bulb Shape	B70 [B 70mm]
Approval and application	
Energy Efficiency Class	G

Mercury (Hg) Content (Max)	12.2 mg
Mercury (Hg) Content (Nom)	12.2 mg
Energy Consumption kWh/1000 h	74 kWh
EPREL Registration Number	473380
Luminaire design requirements	
Bulb Temperature (Max)	350 °C
Cap-Base Temperature (Max)	200 °C
Cap-Base Temperature (Max)-DUP	392 °F
Product data	
Full product code	872790092817400
Order product name	MASTER SON APIA Plus Xtra 70W E27 1SL/24
EAN/UPC - Product	8727900928174
Order code	92817400
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	24
Material Nr. (12NC)	928150719835
Net Weight (Piece)	0.045 kg
ILCOS Code	SE-70-H/E-E27

Dimensional drawing




MASTER SON APIA Plus Xtra 70W E27 1SL/24



Product	D (max)	C (max)
MASTER SON APIA Plus Xtra 70W E27 1SL/24	71 mm	156 mm

MASTER SON APIA Plus Xtra

Photometric data




LDLD_SON-APIA-Light distribution diagram

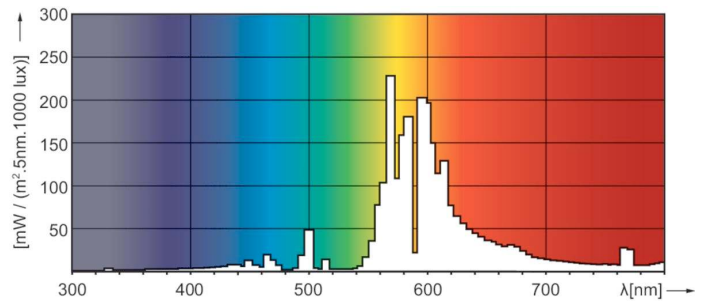


LDPO_SON-APIA-Spectral power distribution Colour

Lifetime

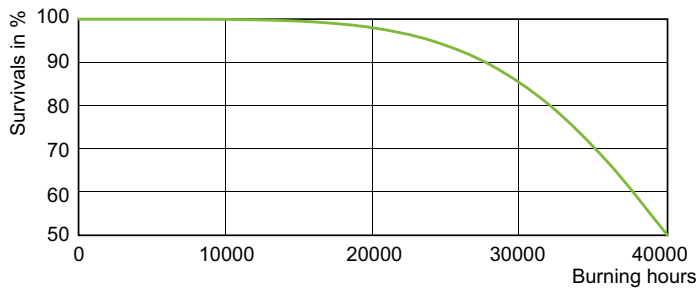

LDLE_SON-APIA_0003-Life expectancy diagram

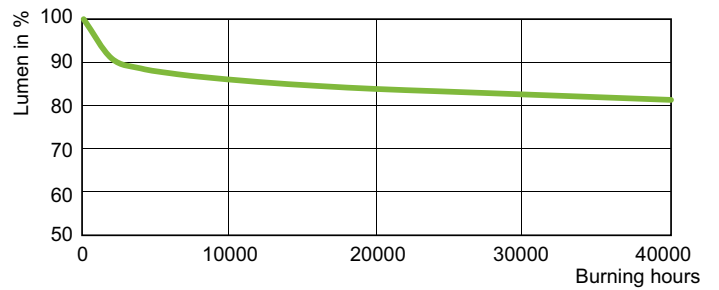

LDLM_SON-APIA_0005-Lumen maintenance diagram

