



MASTER VALUE LEDspot MV

MASTER LED spot VLE DT 3.7-35W GU10 927 36D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells. MASTER LEDspot MV delivers huge energy savings and minimizes maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

General Information	
Cap-Base	GU10 [GU10]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
CE mark	Yes
EU RoHS compliant	Yes

Light Technical	
Color Code	922-927 [CCT of 2200K-2700K]
Beam Angle (Nom)	36 degree(s)
Luminous Flux	270 lumen
Luminous Intensity (Nom)	500 cd
Color Designation	Warm Glow(WG)
Correlated Color Temperature (Nom)	2200 2700 K
Luminous Efficacy (rated) (Nom)	72.00 lm/W
Color Consistency	<6

MASTER VALUE LEDspot MV

Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	270 lumen
Flickering value (PstLM)	1
Stroboscopic effect value (SVM)	0.6
Photobiological safety according to EN 62471 RG1	

Operating and Electrical

Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	3.7 W
Lamp Current (Nom)	18 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V

Temperature

T-Case Maximum (Nom)	70 °C
----------------------	-------

Controls and Dimming

Dimmable	Only with specific dimmers
----------	----------------------------

Mechanical and Housing

Bulb Shape	PAR16 [PAR 2 inch/50mm]
------------	-------------------------


Approval and Application

Energy Efficiency Class	F
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	467611
EyeComfort	Yes

Product Data

Full product code	871951431228900
Order product name	MAS LED spot VLE DT 3.7-35W GU10 927 36D
Order code	31228900
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002979702
Full product name	MASTER LED spot VLE DT 3.7-35W GU10 927 36D
EAN/UPC - Case	8719514312296
EAN/UPC - Product/Case	8719514312289



Dimensional drawing



Product	D	C
MAS LED spot VLE DT 3.7-35W GU10 927 36D	50 mm	54 mm


MASTER VALUE LEDspot MV

Photometric data




Accent Lighting Spots - MAS LED spot VLE DT 3.7-35W GU10 927 36D

Light Distribution Diagram - MAS LED spot VLE DT 3.7-35W GU10 927 36D

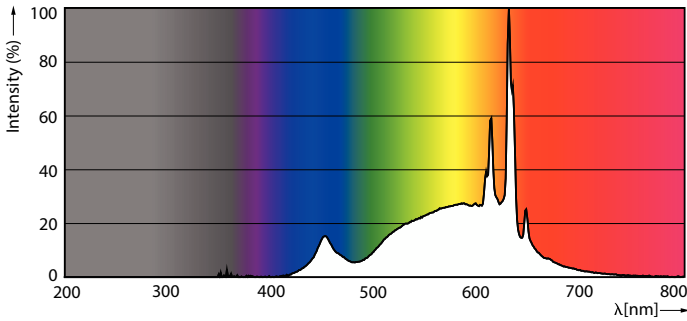


Spectral Power Distribution Colour - MAS LED spot VLE DT 3.7-35W GU10 927 36D

Lifetime

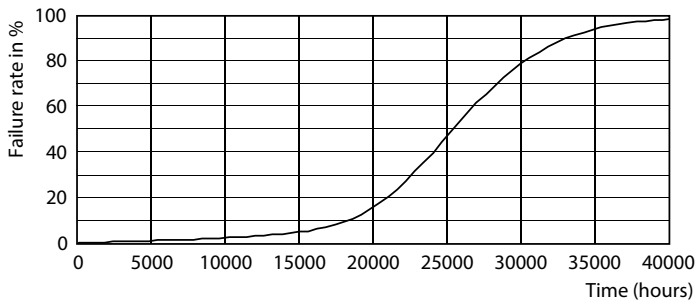

Life Expectancy Diagram - MAS LED spot VLE DT 3.7-35W GU10 927 36D

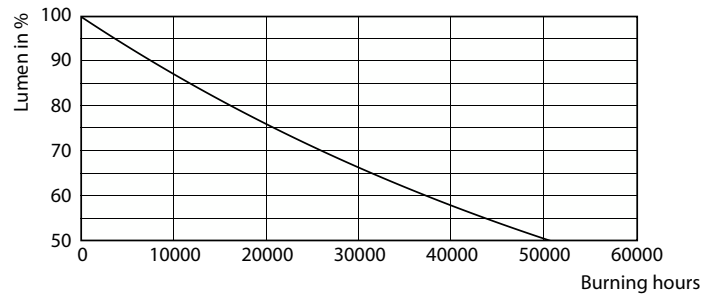

Lumen Maintenance Diagram - MAS LED spot VLE DT 3.7-35W GU10 927 36D

MASTER VALUE LEDspot MV

