



# MASTER MHN-SA

## MASTER MHN-SA 1800W/956 (P)SFC 230V

Compact quartz metal halide lamps with double-pinch

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap-Base	(P)SFC [ (P)SFC]
Operating Position	P15 [ Parallel +/-15D or Horizontal(HOR)]
Life to 5% Failures (Nom)	1300 h
Life To 10% Failures (Nom)	2000 h
Life to 20% Failures (Nom)	3200 h
Life to 50% Failures (Nom)	6100 h
Light Technical	
Colour Code	956 [ CCT of 5600K]
Luminous Flux (Rated) (Nom)	155000 lm
Colour Designation	Daylight
Lumen Maintenance 1000 h (Nom)	95 %
Lumen Maintenance 2000 h (Nom)	91 %
Lumen Maintenance 5000 h (Nom)	76 %
Chromaticity Coordinate X (Nom)	330
Chromaticity Coordinate Y (Nom)	339
Colour Temperature, horizontal (Nom)	5600 K
Luminous Efficacy (rated) (Nom)	86 lm/W


Colour Rendering Index horiz (Nom)	86
Operating and Electrical	
Lamp supply voltage	230 V [ 230]
Power (Rated) (Nom)	1800.0 W
Lamp Current Run-Up (Max)	25 A
Lamp Current (EM) (Nom)	17.3 A
Ignition Supply Voltage (Min)	198 V
Voltage (Max)	130 V
Voltage (Min)	110 V
Voltage (Nom)	120 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Cap-Base Information	20-6

# MASTER MHN-SA

Bulb Shape	TD40 [ TD 40mm]
<b>Approval and Application</b>	
Mercury (Hg) Content (Nom)	92 mg
Energy Consumption kWh/1000 h	1980 kWh
<b>Luminaire Design Requirements</b>	
Bulb Temperature (Max)	980 °C
Pinch Temperature (Max)	300 °C
<b>Product Data</b>	
Full product code	871150020075400

Order product name	MASTER MHN-SA 1800W/956 (P)SFC 230V
EAN/UPC - Product	8718291548263
Order code	20075400
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	928078415130
Net Weight (Piece)	0.219 kg
ILCOS Code	MN-1800-H-PSFc20=6-/H


## Dimensional drawing

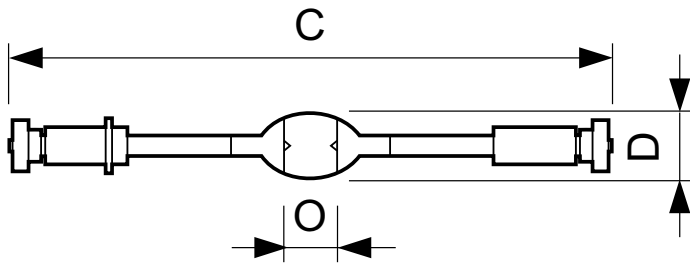

Product	D (max)	O	C (max)
MASTER MHN-SA 1800W/956 (P)SFC 230V	41 mm	25 mm	364 mm

MHN-SA 1800W/956 (P)SFC/20-6 230V


## Photometric data

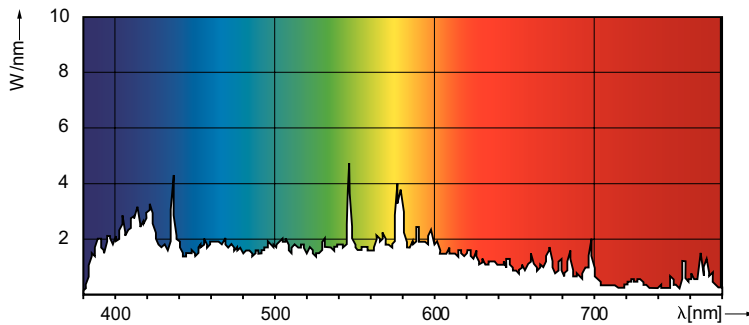


LDPO\_MHN-SA\_1800W\_230V-Spectral power distribution Colour

# MASTER MHN-SA

## Lifetime

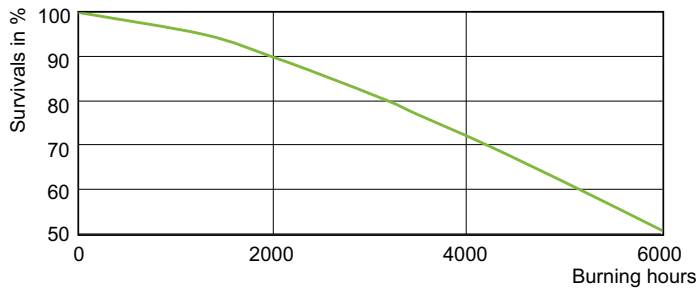

LDLE\_MHN-SA\_0004-Life expectancy diagram

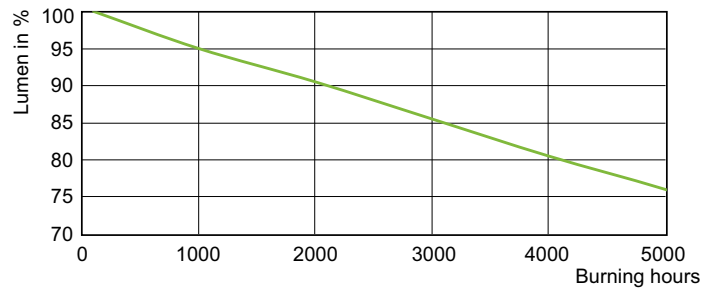

LDLM\_MHN-SA\_0004-Lumen maintenance diagram

