



MASTER TL-D Xtreme



MASTER TL-D Xtreme 36W/840 1SL

Low-pressure mercury discharge lamp with a tubular 26mm envelope

Warnings and Safety

- To achieve published lifetimes for 100% operation, do not dim below 30%
- When used on electromagnetic gear, it is strongly recommended to apply only Philips S10 or S10E starters (for 18W types S2 or S2E) to achieve the published lifetimes, and to install new starters when relamping.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information			
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Chromaticity Coordinate X (Nom)	0.38
Life to 50% Failures (Nom)	47000 h	Chromaticity Coordinate Y (Nom)	0.38
Life to 50% Failures Preheat (Nom)	79000 h	Colour Temperature, horizontal (Nom)	4000 K
LSF 2000 h Rated	100 %	Luminous Efficacy (rated) (Nom)	90 lm/W
LSF 4000 h Rated	99 %	Colour Rendering Index horiz (Nom)	82
LSF 6000 h Rated	99 %	Depreciation 2000 hrs	96 %
LSF 8000 h Rated	99 %	LLMF 4000 h Rated	95 %
LSF 12000 h Rated	99 %	Depreciation 5000 hrs	94 %
LSF 16000 h Rated	99 %	LLMF 8000 h Rated	93 %
LSF 20000 h Rated	99 %	LLMF 12000 h Rated	92 %
Flux measurement reference	Sphere	LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light technical		Operating and electrical	
Colour Code	840 [CCT of 4000K]	Power (Rated) (Nom)	36.4 W
Luminous Flux (Nom)	3200 lm	Lamp Current (Nom)	0.430 A
Luminous Flux (Rated) (Nom)	3250 lm		
Colour Designation	Cool White (CW)		

MASTER TL-D Xtreme

Temperature	
Design Temperature (Nom)	25 °C
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Bulb Shape	T8 [26 mm (T8)]
Approval and application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	3 mg
Mercury (Hg) Content (Nom)	3.0 mg
Energy Consumption kWh/1000 h	37 kWh


EPREL Registration Number	423630
Product data	
Full product code	871150055868840
Order product name	MASTER TL-D Xtreme 36W/840 SLV
EAN/UPC - Product	8711500558688
Order code	55868840
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927982384014
Net Weight (Piece)	135.000 g
ILCOS Code	FD-36/40/1B-E-G13

Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Xtreme 36W/840 SLV	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

MASTER TL-D Xtreme 36W/840 SLV

Photometric data

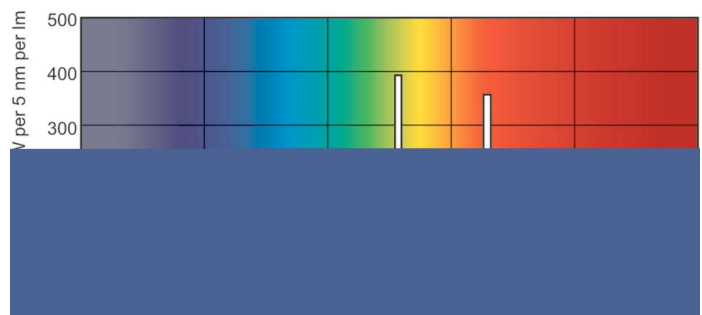


Lightcolour /840

Lightcolour /840



MASTER TL-D Xtreme

Lifetime

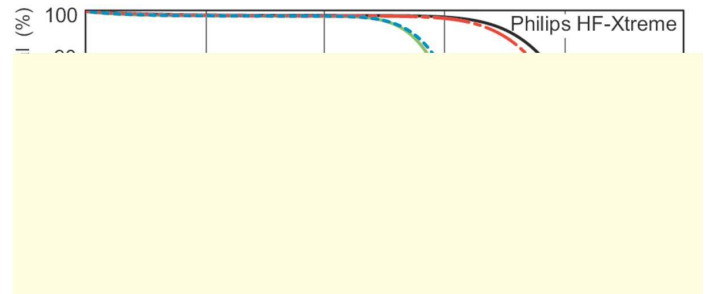

LDLE_TL-D8LL_0001-Life expectancy diagram

LDLE_TL-D8LL_0002-Life expectancy diagram

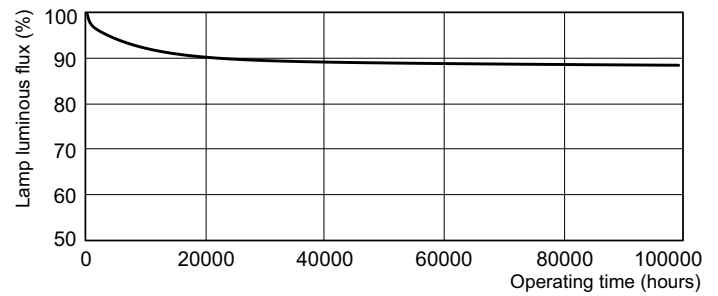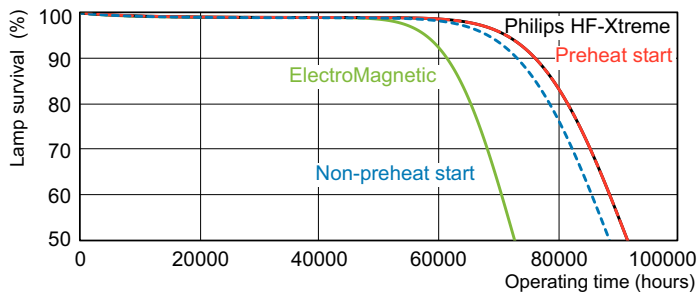

LDLE_TL-D8LL_0003-Life expectancy diagram

LDLM_TL-D8LL_0001-Lumen maintenance diagram

